



# 19" kapazitiver Touchscreen




19" Capacitive Touch Screen Monitor



## Specifications

|               |                        |                                                                                                        |
|---------------|------------------------|--------------------------------------------------------------------------------------------------------|
| General       | Control button         | Set Contrast ratio and Luminance via OSD at the back panel                                             |
|               | Dimensions (W x H x D) | 460mm x 369mm x 47mm (18.11" x 14.52" x 1.85")                                                         |
|               | Cut out Size (W x H)   | 442mm x 351mm (17.40" x 13.81")                                                                        |
|               | Box structure          | Front panel: aluminum-magnesium alloy, anodized coating ;Back cover: SGCC, Ground isolation protection |
|               | Mounting               | Support panel mounted, wall-mounted, Desktop (VESA 75x75 & 100x100)                                    |
|               | Power Supply           | DC 12 - 24V                                                                                            |
|               | Power Dissipation      | 14W                                                                                                    |
|               | Signal input           | VGA & DVI-D                                                                                            |
|               | Weight                 | 5.18kg (11.42lb)                                                                                       |
| LCD           | LCD Size               | 19" HD TFT                                                                                             |
|               | Resolution             | 1280 x 1024                                                                                            |
|               | Colors                 | 16.7MB                                                                                                 |
|               | Active Area (W x H)    | 376.32mm x 301.06mm ( 14.82"x 11.85" )                                                                 |
|               | Backlight              | LED                                                                                                    |
|               | MTBF                   | 30000hrs                                                                                               |
|               | Pixel Pitch(H x V)     | 0.294 x 0.294                                                                                          |
|               | Luminance              | 250cd/m <sup>2</sup>                                                                                   |
|               | Contrast Ratio         | 1000 : 1                                                                                               |
|               | Viewing Angle          | (L) 85 / (R) 85 / (T) 80 / (B) 80                                                                      |
| Touchscreen   | Type                   | Multi-point capacitive touch screen                                                                    |
|               | Transmittance          | > 87%                                                                                                  |
|               | Controller interface   | USB                                                                                                    |
|               | Driver Support         | Windows XP, Windows 7, Winows8, Windows 10, Linux                                                      |
|               | Multi-touch            | 10 points (windows system)                                                                             |
|               | Surface Hardness       | Mohs' Number 7H                                                                                        |
| Environmental | Operating Temperature  | -20 ~ 60° C (-4~140° F)                                                                                |
|               | Storage Temperature    | -30 ~ 80° C (-22 ~ 176° F)                                                                             |
|               | Relative humidity      | 10~95% RH@40°C,non-condensing                                                                          |
|               | Vibration              | Operating Random Vibration Test 5~500Hz, 1.5Grms@with SSD, follow IEC 60068-2-64                       |
|               | Shock                  | Operating 10G peak acceleration (11ms duration), follow IEC 60068-2-27                                 |
|               | EMC                    | CE/FCC Class B                                                                                         |
|               | Front panel protection | IP65 compliant                                                                                         |

Dimensions:

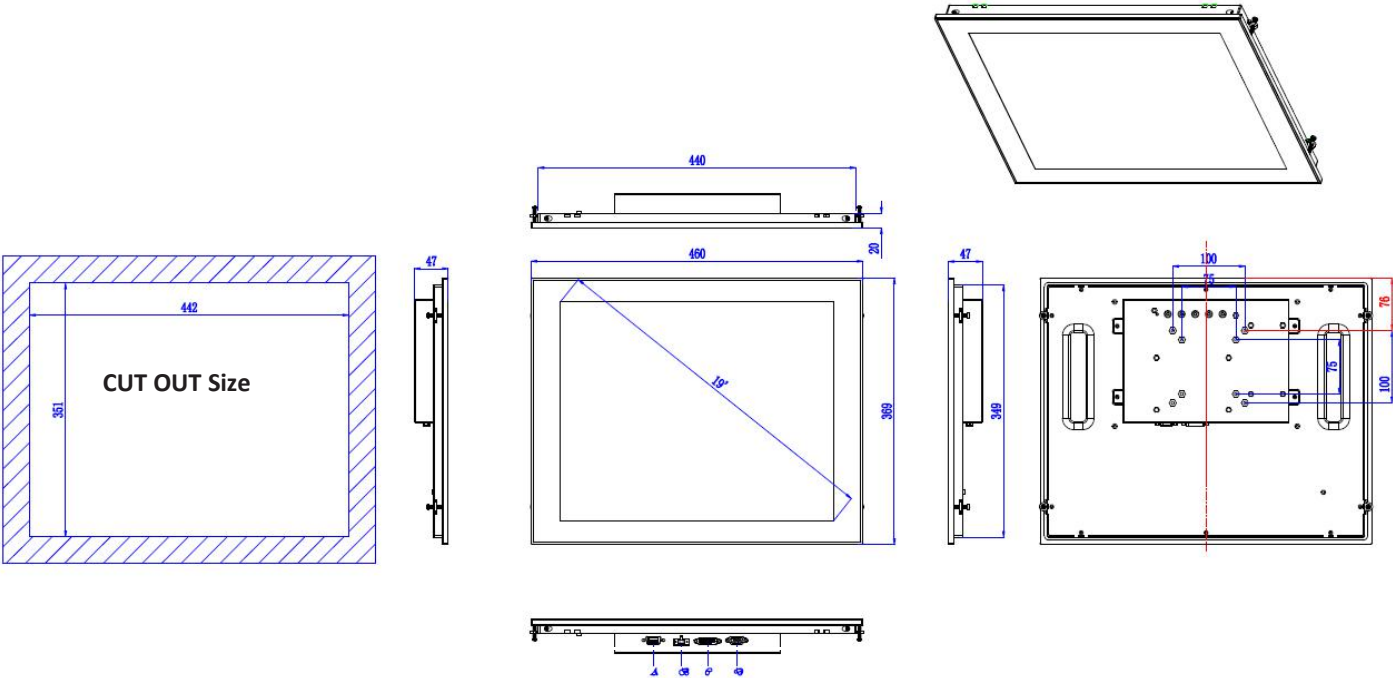

|       |         |       |       |
|-------|---------|-------|-------|
| A:USB | B:DC IN | C:DVI | D:VGA |
|-------|---------|-------|-------|

Packing List:

|                 |                                    |
|-----------------|------------------------------------|
| Mounting screws | 8*pcs apply to Thickness=1mm~1.2mm |
| Terminal        | 2pin Phoenix terminal              |
| VGA Cable       | 1.8M                               |
| USB Cable       | 1.8M                               |
|                 |                                    |

Optional Items:

|            |                                     |
|------------|-------------------------------------|
| Adapter    | 12V/3.33A,40W 2pin Phoenix terminal |
| Power Cord | 1.8M/3M/5M                          |
| VGA Cable  | 3M/5M                               |
| USB Cable  | 3M/5M                               |
| DVI Cable  | 1.8M/3M/5M                          |